

(19) World Intellectual Property
Organization
International Bureau



01 APR 2005



(43) International Publication Date
15 April 2004 (15.04.2004)


PCT

(10) International Publication Number
WO 2004/031651 A3

- (51) International Patent Classification⁷: F23C 11/04, F23M 5/08, F24H 1/43, F23D 14/58
- (21) International Application Number: PCT/CA2003/001514
- (22) International Filing Date: 1 October 2003 (01.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
TO2002A000850 1 October 2002 (01.10.2002) IT
- (71) Applicant (for all designated States except US): POW-ERTECH INDUSTRIES INC. [CA/CA]; Suite 1700 - 1095 West Pender Street, Vancouver, British Columbia V6E 2M6 (CA).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): MOVASSAGHI, Mehrzad [CA/CA]; 2316 West 13th Avenue, Vancouver, British Columbia V6K 2S6 (CA).
- (74) Agent: VERMETTE & CO.; Box 40, Granville Square, 230 - 200 Granville Street, Vancouver, British Columbia V6C 1S4 (CA).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
— with amended claims

[Continued on next page]

(54) Title: MULTIPLE PLATE COMBUSTOR

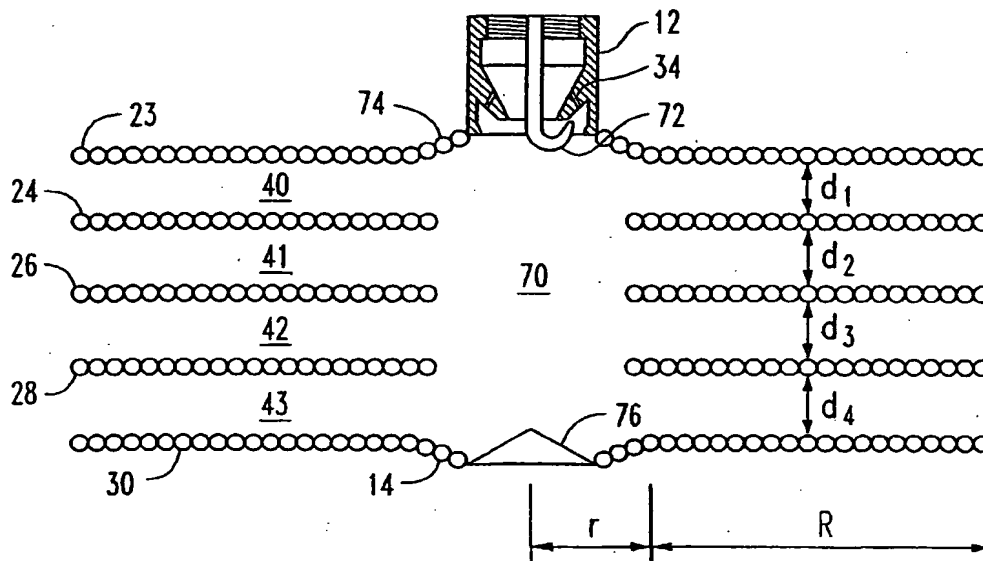

(57) **Abstract:** The invention consists of a pulse combustor, comprising two spaced apart outer plates (23,30), the outer plates 5 having flat outer regions, conical regions (74,14) inside of the flat regions and central hubs, where the volume between conical regions of the plates defines a combustion chamber (70). The pulse combustor further comprises a plurality of intermediate plates (24,26,28) located between the outer plates, the plurality of intermediate plates being spaced apart to form tailpipe regions (40, 41,42,43) therebetween and between the outer plates and adjacent ones of the intermediate plates and a burner coupled to one of the hubs, the burner (12) operative to ignite a fuel/air mixture in the combustion chamber. The outer and intermediate plates have spiral coolant passageways therein for conducting cooling fluid to cool expanding gases traveling between the plates through the tailpipe regions. The invention further consists of a burner assembly for use in a combustion chamber.

WO 2004/031651 A3

10/PRTS

10/530014

JC17 Rec'd PCT/PTO 01 APR 2005

MULTIPLE PLATE COMBUSTOR

FIELD

5 The invention relates to a pulse combustor using multiple plates for increased power output.

BACKGROUND

10 A pulse combustor is a device in which a mixture of air and fuel is initially ignited by, for example, an ignition rod. The ignited gases expand rapidly with an associated rapid increase in pressure and temperature. A resultant pressure wave travels down the device expelling the burnt
15 gases out of an exhaust region. Heat exchange occurs at the walls of the device cooling the gases and enhancing the pressure drop occurring after passage of the pressure wave. This pressure drop due to expansion of the gases combined with the cooling caused by heat exchange at the walls causes
20 the pressure inside the combustion chamber to drop below the ambient pressure (i.e. negative pressure) allowing new gases to be drawn into the combustion chamber. The exhaust flow comes to a rest, with some gases exiting the plates and some returning into the combustion chamber. The flow in the
25 exhaust region reverses and compresses the new air and gas mixture and with the temperature in the combustion chamber still being high, ignition occurs once again. The pulse combustor is used primarily as a hot water boiler, water heater, or low and high pressure steam boiler.

30

U.S. Patent No. 4,968,244 describes a pulse combustor with a radial exhaust chamber and a carburetor coupled to the combustion chamber for injecting a pre-determined distribution of fuel mixture into the combustion chamber.

5 The design of the casing of the exhaust chamber comprises an inside plate and outside plate located on each side of the combustion chamber. The exhaust chamber has spiral coolant grooves machined onto in the inside plate which are covered by the outside plate to form a coolant passageway. The
10 usage of two plates bonded together and machining a spiral groove in the plate makes construction difficult and expensive. Moreover, the rapid heating and cooling stresses the bonding between the disc and plate making the device susceptible to coolant leaks. Finally, the somewhat complex
15 design of the carburetor adds to the expense of the device. Also, operation of this design is limited to a high gas pressure which can be above regulated levels, making it unusable for certain areas, such as residential.

20 PCT Application No. WO97/20171 describes a pulse combustor having a central combustion chamber surrounded by an exhaust chamber, wherein a portion of the combustion and exhaust chambers are formed between two spaced apart walls of spiral wound coolant tubing. The coolant tubing, which
25 forms the walls, provides much greater heat transfer area while at the same time considerably simplifying the construction of the combustor. A fuel nozzle is located at an inlet to the combustion chamber and a spark generator is

provided in the combustion chamber and proximate the nozzle in order to ignite the fuel entering the pulse combustor upon startup.

5 The limitations on the radius of the combustion chamber and the radius of the tail pipe result in a limit to the total amount of power (BTU's of heat generation) achieved by the pulse combustor. Therefore, a combustor is needed that is scaleable to achieve an increased power output.

10 It is an object of this invention to provide a pulse combustor that has a scaleable power output.

15 It is a further object of this invention to provide a modified burner for a pulse combustor that provides for a scaleable power output.

SUMMARY

20 The invention consists of a pulse combustor, comprising two spaced apart outer plates, the outer plates having flat outer regions, conical regions inside of the flat regions and central hubs, where the volume between conical regions of the plates defines a combustion chamber. The pulse
25 combustor further comprises a plurality of intermediate plates located between the outer plates, the plurality of intermediate plates being spaced apart to form tailpipe regions therebetween and between the outer plates and adjacent ones of the intermediate plates and a burner
30 coupled to one of the hubs, the burner operative to ignite a

fuel/air mixture in the combustion chamber. The outer and intermediate plates have spiral coolant passageways therein for conducting cooling fluid to cool expanding gases traveling between the plates through the tailpipe regions.

5

Preferably, the intermediate plates are spaced to provide variable resistance to create a uniform gas flow between each set of adjacent plates.

10

Optionally, the pulse combustor may include a burner assembly mounted in the combustion chamber. The burner assembly having a hollow elongated tube with nozzle openings spaced around a cylindrical surface thereof to equalize gas flow into tailpipe regions between adjacent ones of said

15

intermediate and outer plates.

The invention also consists of a burner assembly for use in a combustion chamber, comprising an elongated hollow tube, having a plurality of nozzle openings along its cylindrical surface. One end of the burner is couplable to a burner nozzle such that upon ignition of a fuel mixture in the hollow tube, ignited gas escapes uniformly around and along the hollow tube.

20

25

The hollow elongated tube may be cylindrical, with a plurality of radially spaced apart elongated slots extending along a length of its cylindrical surface and including a plurality of elongated nozzle assemblies having nozzle openings spaced along its length. The nozzle assemblies

having a plenum accessing the nozzle openings and each nozzle assembly affixed to an outer surface of the cylinder over an associated slot.

5 **BRIEF DESCRIPTION OF THE DRAWINGS**

The invention itself both as to organization and method of operation, as well as additional objects and advantages thereof, will become readily apparent from the following
10 detailed description when read in connection with the accompanying drawings:

Figure **1A** is a cross-sectional view in elevation of a multiple plate combustor assembly without a burner assembly;

15

Figure **1B** is a cross-sectional view of a multiple plate combustor assembly with a burner assembly;

Figure **2A** is a front view of an outer plate with a
20 central hub;

Figure **2b** is a side view of an outer plate with a central hub;

25 Figure **3A** is a front view of an intermediate plate;

Figure **3B** is a left side view of the intermediate plate of Figure **3A**;

30 Figure **4A** is a side view of an assembled pulse combustor made up of 5 total plates;

Figure **4B** is a detail view of the plate spacing assembly;

Figure **5A** is a end view of a burner nozzle;

5

Figure **5B** is a sectional side view of the burner nozzle of Figure **5A**;

Figure **6A** is a perspective view of a cylinder for
10 making a burner;

Figure **6B** is side elevation view of the burner of Figure **6A**;

15 Figure **7A** is a perspective view of a nozzle piece for making a burner;

Figure **7B** is a side view of the nozzle piece of Figure **7A**;

20

Figure **7C** is a bottom view of the nozzle piece of Figure **7A**;

Figure **8A** is a sectional view of a burner assembly;

25

Figure **8B** is view taken along the line AA;

Figure **8C** is a view taken along the line BB;

30

Figure **9** is a side view partially in section of a cone for use in the burner assembly.

DETAILED DESCRIPTION

Referring to Figure 1A the multiple plate pulse combustor assembly has 5 disc-shaped plates or coils **23**, **24**, **26**, **28**, and **30**, which are held in parallel orientation by a nut and bolt assembly (not shown). A burner **12** passes into a central opening of the first coil or plate **23**. A flame spreader **76** is mounted in the center of the last coil **30**. Between sets of adjacent coils (**23,24**), (**24,26**), (**26,28**), (**28,30**) there are respective tailpipe regions **40**, **41**, **42**, and **43** having respective gaps d_1 , d_2 , d_3 , and d_4 . Each of the outer coils **23** and **30** has an associated central conical region **74** and **14**, respectively.

In operation an air and gas mixture enters the burner **12** and some of the mixture passes through the orifices **34**. An ignition rod or spark plug **72** ignites the mixture producing a flame that rapidly spreads towards the flame spreader **76**. Combustion takes place inside the combustor chamber **70** in a cyclical fashion. The combustion of the air/gas mixture generates a sudden increase in the pressure of the combustion chamber **70**, which, in turn, generates pressure waves. The pressure waves travel radially outwardly and carry the exhaust product through the tailpipe regions **40**, **41**, **42**, and **43** towards the perimeter of the coils **23**, **24**, **26**, **28**, and **30**. The sudden expansion of the gaseous exhaust products, together with the cooling through heat exchange at the walls of the coils **23**, **24**, **26**, **28**, and

30, creates a low pressure inside the combustion chamber 70. The low pressure causes the pressure waves reaching the perimeter of the coils 23, 24, 26, 28, and 30 to come to an instantaneous rest. Some gases are exhausted into the surrounding ambient area around the combustor 10, while some return to the combustion chamber in the form of rarefaction waves. Simultaneously, due to the low pressure in the combustion chamber, a new volume of the air/gas mixture is introduced into the combustion chamber 70. The returning waves pre-compress this new volume of air/gas mixture. As the temperature in the combustion chamber remains elevated, the new air/gas mixture is ignited without the need for a spark and the combustion cycle is repeated.

The heat generation of a two plate combustor is limited to about 600,000 BTUs. One cannot simply scale up the combustor to increase the power generation. By putting one or more plates between the two outer plates 23 and 30, it has been found that it is possible to increase the heat generation over that of a two plate system. However, to maximize the heat distribution one must balance the flow of ignited gas into each of the tailpipes. One can adjust the spacing between the plates so that the gas flow down each tailpipe region is the same. This will result in the tailpipe regions becoming narrower as one approaches the flame spreader.

The ratio of r/R shown in Figure **1A** is critical to proper combustion. If the volume of the combustion chamber **70** is too large, then combustion will become less efficient or may not occur at all. If the gap is too large then the velocity of the gas will slow. The method of adjusting the tailpipes becomes impractical after three intermediate plates are used. One solution is to use a burner that distributes the flame evenly to control the flow of the exhaust gases rather than relying on factors such as plate spacing.

Referring to Figure **1B**, the multiple plate pulse combustor **10** consists of two outer plates or coils **23** and **30** also shown in Figures **2a** and **2b**. A stainless steel cast central hub **11** is mounted in the central opening of plate or coil **30** and an annular hub **16** mounted in the central opening of plate or coil **23**. Alternatively, machined (grooved) pipes may be use in place of the cast central hub **11**. If pipes are used, a stainless steel plate is welded to one pipe, with the resulting combination referred to herein as a "spreader hub". For the purposes of the description "hub" shall refer to both cast hubs and machined pipes.

Coiled around each hub **11** and **16** is a stainless steel tube forming plates or coils **30** and **23**, respectively. Between these two coils **30** and **23** are located three intermediate coils **24**, **26** and **28**, made up of stainless steel

coils without hubs as shown in Figures **3a** and **3b**. All of the coils **23**, **24**, **26**, **28**, and **30** are held in a parallel position, spaced apart a predetermined distance, by means of four stainless steel spacers or rods and adjustment nut
5 assemblies **38** (shown also in Figure **4b**).

The volume contained between the two hubs **11** and **16**, together with the volume between conical sections **14** and **74**
10 of the coils **23** and **30**, defines the "combustion chamber" of the combustor **10**. The volume contained between each set of coils **40**, **41**, **42**, **43** is referred to as the "tailpipe" for the two coils enclosing that volume. The burner is made up of a central cylindrical, stainless steel tube **18** having
15 elongated slots **17** radially spaced around its cylindrical surface (see Figures **6A** and **6B**). Over each slot is affixed a nozzle assembly **20** (see Figures **7A**, **7B**, and **7C**), each assembly having a plurality of nozzle openings **21**. A cone
20 **22** is positioned in the tube **18** opposite the nozzle slots **17** with its end closer to the burner hub than the spreader hub. A refractory material **46** surrounds the tube **18** adjacent the elongated slots **17**. Hub **16** encloses the refractory material **46** and has a short section of spiral groove around which are formed stainless steel coils of plate or coil **23**. Coupled
25 to an open end of tube **18** by means of a frustro-conical section of pipe **32** is a burner nozzle **12**. The combustor **10**

is mounted to a front panel **48** of a housing (not shown) by means of bolts **44** which are threadedly received by hub **16**.

Referring to Figures **2A** and **2B**, plate or coil **30**
5 has a central hub **11**, a conical region **14**, a cooling water inlet **25** at an outer periphery of the coil **30** and a heated water outlet **40**.

Referring to Figures **3A** and **3B**, the flat coils as
10 represented by coil **24** are all substantially identical and have a wide opening, a cooling water inlet **31** at a periphery and a heated water outlet **52** proximate the center of the coil **24**.

Referring to Figure **4A** and **4B**, an external view of
15 the assembled combustor **10** shows that a bolt with nuts and spacers **38** are used to hold the plates or coils **23**, **24**, **26**, **28** and **30** in position with the plates all parallel to one another.

Referring to Figures **5A** and **5B**, the burner nozzle
20 **12** has a plurality of radially spaced apart holes **34** which permit the passage of a fuel-air mixture which is ignited by a sparker (not shown). The majority of the fuel-air mixture
25 passes through the center of the burner assembly **64**.

The stainless steel cylinder **18** shown in Figures
6A and **6B** has a plurality of radially spaced apart,

elongated slots **17** through its cylindrical surface, an open end **13** and a closed end **15**.

In Figures **7A**, **7B**, and **7C**, the nozzle strip or assembly **20** is an elongated block of metal having a recess **19** that matches the shape of the slots **17** in cylinder **18**, and also has a regularly spaced array of transverse, spaced apart bores **21** extending from an interior of the recess **19** to the exterior on either side of the recess **19**. The nozzle strip **20** is welded to the cylinder **18** over slots **17**

The burner assembly of Figures **8A**, **8B**, and **8C** forms the chamber in which combustion takes place and consists of the cylindrical stainless steel chamber **18**, the attached nozzle strips **20**, and hub **16** which is fitted over a sleeve of refractory material **58**. A cone **22** is fitted into cylinder **18** with the base of the cone **22** aligned parallel with the end **15** of the cylinder **18**. Connections to an ignitor **54**, a flame sensor **52** and pilot line **56** are made to the refractory material **58**. As shown in Figure **9** the cone structure **62** has a parabolic rather than a conical shape.

In operation, water enters each of coils **23**, **24**, **26**, **28**, and **30** at the perimeter and exits at or near the center, thus allowing for counterflow heat exchange.

An air and gas mixture enters the burner assembly **10** through burner nozzle **12**, past coupler **32** and into

combustion chamber 70 in an interior of cylinder 18. A spark from an ignition rod or spark plug 72, installed in the burner 12 ignites the mixture.

5 While the combustion cycle is generally reliable, there are a number of design parameters that are significant for proper functioning of the pulse combustor. The first parameter is the velocity of the exhaust gases. The velocity must be controlled such that the low pressure in
10 the combustion chamber is generated at the exact instant when the combustion products reach the perimeter of a given coil. If the velocity of the exhaust gases is too slow, then none of the exhaust gases will exit the combustor 10 to the ambient surroundings. Exhaust gases of a certain mass
15 and volume will remain in the tailpipe and combustion chamber 70. The presence of these exhaust gases will reduce the volume of the new air/gas mixture entering the combustion chamber 70. Therefore, depending on the amount of the exhaust gases remaining from the first cycle, either
20 the second cycle will not take place due to a "choking" effect or unclean or incomplete combustion will occur. As unclean combustion increases the amount of exhaust gases that remain in the tailpipe and combustion chamber, the choking effect will take place eventually.

25 If the velocity of the exhaust gases is too fast, then a large percentage or all of them will exit into the ambient surroundings. In this case, there will not be a sufficient

amount of exhaust gases returning with the rarefaction waves to allow for pre-compression of the air/gas mixture.

Without the pre-compression, ignition of the new air/gas mixture does not occur and combustion does not take place.

5

The next two parameters are the respective volumes of the combustion chamber and tailpipe (the mass of gas to be combusted), which will reflect the desired capacity of the boiler/water heater. The depth and radius of the combustion chamber **70** define its volume. Similarly, the gaps between the flat sections of all the plates **23, 24, 26, 28, and 30** and their radii define the volume of the tailpipe. Therefore, the radius and depth or gap dimensions control the volume of the combustion chamber **70** and tailpipe.

15

There are operational restrictions on the dimensions of the combustion chamber **70** that prevent arbitrary changes in the radius and depth to obtain a required volume. For example, if depth is increased in order to minimize the radius, beyond a certain optimum value the spreader hub will act as a "heat sink". The flame from the burner will not spread sufficiently over the adjacent coils (the conical section of the heat exchanger), reducing the heat transfer from the flame to the water. Furthermore, the high temperature of the spreader hub will result in high NOx values, which makes the device impractical for many uses.

20

25

Conversely, if the depth is reduced below a certain optimum value the required expansion of exhaust gases will not take place, resulting in the choking effect. Also, flame impingement (contacting the spreader hub) will occur, causing unclean combustion and a high CO content in the exhaust gases, which is not allowed under the guidelines of most regulatory and authorizing/certifying agencies. The two effects combine to make the combustor un-usable.

With respect to the plates **23, 24, 26, 28, and 30**, the radius **R** will have a minimum value below which there will be an insufficient amount of available surface for heat transfer. As a result, the gap between two adjacent coils cannot be increased at the expense of smaller radii (to maintain a constant volume). Similarly, the spacing of the gap has its own upper limit, beyond which there will be insufficient contact between the exhaust gases and the plate surface, and the heat of the combustion will not be transferred to the water in the coils **23, 24, 26, 28, and 30**. Conversely, if the gap distance is too small, the velocity of the exhaust gases results in a vibration effect on the plates, creating an undesirable loud humming noise and potentially damaging the components of the combustor. Also, more of the exhaust gases will escape into the ambient surroundings, resulting in a less than sufficient amount returning in the form of rarefaction waves to continue combustion.

As a result of the above effects, the radius and depth of the combustion chamber 70, as well as the radius and gap spacing of the plates 23, 24, 26, 28, and 30, must be
5 carefully controlled to ensure that complete pulse combustion is possible.

When the total number of plates is increased beyond two, in addition to the above noted design parameters, a
10 third major feature will play a significant role in the overall operation of the combustor 70. This feature is the optimum and uniform distribution of the exhaust gases in between consecutive coils 23, 24, 26, 28, and 30. With respect to the uniform distribution of gases, there are
15 three major parameters that affect the performance of the combustor.

First, similar to electric current or any fluid, exhaust gases tend to travel the path of least resistance.
20 Second, the flame temperature varies along the flame length (parallel to the axis of the combustion chamber). That is, the tip of the flame has a higher temperature than its origin. Consequently, the exhaust gases and the air surrounding the flame will have different temperatures along
25 the length of the flame and, thus, along the depth of the combustion chamber 70. Finally, due to the direction of the flame, the natural tendency of flame movement (direction of

the flame) is towards its tip, therefore towards the last gap between the coils **23, 24, 26, 28, and 30.**

As a result, the highest velocity of exhaust gases
5 would be through the last gap adjacent tailpipe region **43.**
Thus the highest pressure drop occurs through that gap.
This pressure drop decreases along the length of flame, from
the tip to the source. Therefore, the exhaust gas velocity
will be different along the length of the flame and thus
10 along the depth of the combustion chamber **70.**

Therefore, the intermediate plates **24, 26, and 28** must
be placed parallel transverse to an axis of the combustion
chamber **70,** such that uniform and equal amount of heat is
15 transported through each gap **40, 41, 42, and 43** by the
exhaust gases. As well, the exhaust gases must have the
desired velocity to allow optimum heat transfer, pulsation,
and low noise operation as described above.

20 Referring to Figure **5,** the series of circular nozzles
drilled around the inner periphery of a short cylinder A
mixture of air and gas enters the burner **10** through these
nozzles and is combusted by a flame rod (not shown). Flame
from these burners follows a straight path with in an
25 elliptical configuration with its longer axis parallel to
the axis of the cylinder **18.**

In order to be able to obtain maximum heat transfer
between the combustion products (exhaust gases) and the

water flowing through the coils 23, 24, 26, 28, and 30, allowance has to be made for the loss of flame temperature along the flame's length, and a varying pressure drop through consecutive gaps. In a multiple coil
5 configuration, the natural tendency for heat distribution would be towards the last coil 30 and through the gap between the last two coils 28 and 30. To be able to achieve maximum heat transfer, and the corresponding high efficiency and condensing effect, the exhaust gases have to be
10 distributed uniformly among the gaps or in the tailpipe regions 40, 41, 42, and 43 between consecutive coils. To achieve this objective, without adding any external components to the heat exchanger, the flow of gases must be controlled by creating the appropriate resistance to flow in
15 each gap or tailpipe region. In its simplest terms, resistance to the flow is increased along the length of the flame, from the tip towards the source. Without using a burner this is achieved by adjusting the design of the slope of the conical section of the last coil (which holds the
20 spreader hub), and determining the optimum values for the gaps between consecutive coils. Values of these gaps are determined by using a series of fluid dynamic criteria and equations that involve the flame velocity of propagation, the temperature gradient along the length of the flame, and
25 the velocity of exhaust gases.

II: Use of specifically designed cylindrical burner

To minimize the effect of the gaps between coils, and the slope of the conical section of the last coil on the heat distribution, an alternative burner can be used. The burner comprises three major components: one stainless steel cylinder (**Figure 6**), one stainless steel cone (**Figure 9**), and six stainless steel nozzle strips (**Figure 7**). Six cuts are made along the transverse axis of the cylinder, equal in length to that of the strips. Each strip is welded on top of each cut. The cone is installed inside the cylinder such that its circular end is on the same plane as one end of the cylinder with its conical end near the other end of the cylinder, where mixture of air and gas enter the cylinder (**Figure 8**). The number of slots and nozzle strips may be adjusted, but is always equal.

Each nozzle strip has a number of pre-determined holes patterned in a pre-determined profile, with the most basic profile being a series of equally-spaced apart, identically dimensioned holes. Arrangement of the holes on each strip, length of each strip, nozzle profile, and shape of the cone govern the velocity and distribution of the flame through the cylinder. The result is that the flame is uniformly ejected or distributed from the surface of the cylinder, through the nozzles, into consecutive gaps of the heat exchanger.

The burner is installed on the burner hub by means of a flange (**Figure 8**), and is connected to a blower through

which the mixture of air and gas flows through the burner.
The air/gas mixture is combusted by a spark from the flame
rod or igniter. Flames through the nozzle strips are
ejected radially outward through consecutive gaps of the
5 combustor. The length of the cylinder is governed by, and
proportionate to, the depth of the combustion chamber.

Accordingly, while this invention has been described
with reference to illustrative embodiments, this description
10 is not intended to be construed in a limiting sense.
Various modifications of the illustrative embodiments, as
well as other embodiments of the invention, will be apparent
to persons skilled in the art upon reference to this
description. It is therefore contemplated that the appended
15 claims will cover any such modifications or embodiments as
fall within the scope of the invention.

WE CLAIM:

1. A pulse combustor, comprising:

a) two spaced apart outer plates, said outer plates
5 having flat outer regions, conical regions inside
of the flat regions and central hubs, wherein the
volume between conical regions of said plates
defines a combustion chamber;

b) a plurality of intermediate plates located between
10 said outer plates, said plurality of intermediate
plates being spaced apart to form tailpipe regions
therebetween and between said outer plates and
adjacent ones of said intermediate plates;

c) a burner coupled to one of said hubs, said burner
15 operative to ignite a fuel/air mixture in said
combustion chamber,

wherein said outer and intermediate plates have spiral
coolant passageways therein for conducting cooling
20 fluid to cool expanding gases traveling between said
plates through said tailpipe regions.

2. A pulse combustor according to claim 1, wherein said
intermediate plates are spaced to provide equal resistance
25 to gas flow between each set of adjacent plates.

3. A pulse combustor according to claim 1, wherein said
plates are circular.

4. A pulse combustor according to claim 1, wherein each of said plates is made of spiral wound hollow stainless steel tubing.

5 5. A pulse combustor according to claim 4, wherein each have a conical region proximate said combustion chamber, which conical region extends outwardly.

6. A pulse combustor according to claim 4, including
10 spacers between each plates to set the separation between adjacent plates.

7. A pulse combustor according to claim 6, wherein said burner assembly further includes a parabolic cone mounted
15 inside said elongated hollow tube with a circular end of said parabolic cone aligned with one end of said hollow elongated tube.

8. A pulse combustor according to claim 1, including an
20 inlet to said coolant passageway at a periphery thereof and an outlet from said coolant passageway proximate a center of said so that coolant flow is counter to ignited gas flow through said tailpipe regions.

25 9. A pulse combustor according to claim 6, wherein said hollow elongated tube is cylindrical and has a plurality of radially spaced apart elongated slots extending along a length of its cylindrical surface and including a plurality of elongated nozzle assemblies having nozzle openings spaced
30 along its length, said nozzle assemblies having a plenum

accessing said nozzle openings and each nozzle assembly
affixed to an outer surface of said cylinder over an
associated slot.

5

ABSTRACT

The invention consists of a pulse combustor, comprising two spaced apart outer plates, the outer plates
5 having flat outer regions, conical regions inside of the flat regions and central hubs, where the volume between conical regions of the plates defines a combustion chamber. The pulse combustor further comprises a plurality of intermediate plates located between the outer plates, the
10 plurality of intermediate plates being spaced apart to form tailpipe regions therebetween and between the outer plates and adjacent ones of the intermediate plates and a burner coupled to one of the hubs, the burner operative to ignite a fuel/air mixture in the combustion chamber. The outer and
15 intermediate plates have spiral coolant passageways therein for conducting cooling fluid to cool expanding gases traveling between the plates through the tailpipe regions. The invention further consists of a burner assembly for use in a combustion chamber.

20